

FE7-63

Mini Circuit Breaker (AC MCB)


FE7-63 have protective function as overload, and are used in lighting distribution system in industry commerce and dwelling, and protect fractional electric motors. And they also have many merits of high protective grade (up to IP20), high breaking capacity, reliable sensitive, action convenient, multi pole assembling, long life ect. They are mainly adapted to the circuit of AC 50Hz, 250V in single pole, 415V in double, three, four poles for protecting overload and short circuit. Meanwhile, they are also used in turning on or off the electric apparatus and lighting circuit under the normal conditions.



Specifications

Model	EN60898(IEC60898)/IEC60947-2
Rated Voltage	230V/400V AC
Rated Current	3, 6, 10, 16, 20, 25, 32, 40, 50, 63A
Rated Breaking Capacity	10KA IEC60898(3~63A)
Characteristic Curve	B, C, D
Max. Fuse That Can Be Connected To	100AGL (>10KA)
Selective Grade	3
Working Ambient Temperature	-5°C ~ +40°C
Enclosed Protective Class	IP20
Nominal Frequency	50/60Hz
Maximum Operating Voltage(Ue)	400V AC
Insulation Voltage(Ui)	6KV
Voltage Testing Pulse(Uimp)	10KA
Maximum Cutting Capacity(Icu)	10KA
Electrical Life	Not less than 8000 times
Mechanical Life	Not less than 20000 times

Dimensions

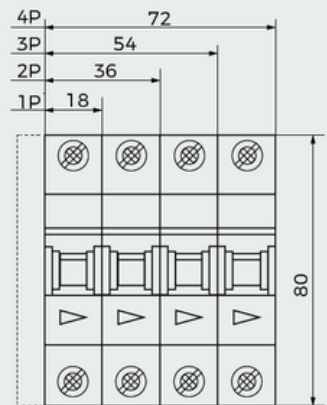

Over current tripping characteristic

Item	Model	Rated Current	Initial State	Test Current	Limited Time	Limited Time	Remark
a	B, C, D	1~ 63A	Cold state	1.13In	t 1h	Non-tripping	
b	B, C, D	1~ 63A	Immediately after the previous test	1.45In	t<1h	Tripping	The current rise steadily to a fixed value within 5s
c	B, C, D	In ≤ 32A	Cold state	2.55In	1s<t<60s	Tripping	
		In 32A	Cold state	2.55In	1s<t<120s	Tripping	
	B	1~ 63A	Cold state	3In	t≤0.1s	Non-tripping	
				5In	t<0.1s	Tripping	
	C			5In	t≤0.1s	Non-tripping	
				10In	t≤0.1s	Tripping	
	D			10In	t≤0.1s	Non-tripping	
				10In	t<0.1s	Tripping	

Characteristic Curve

FE7-63 Characteristic curve

