




THAI UNION WIRE CO., LTD.

ELECTRIC WIRES & CABLES

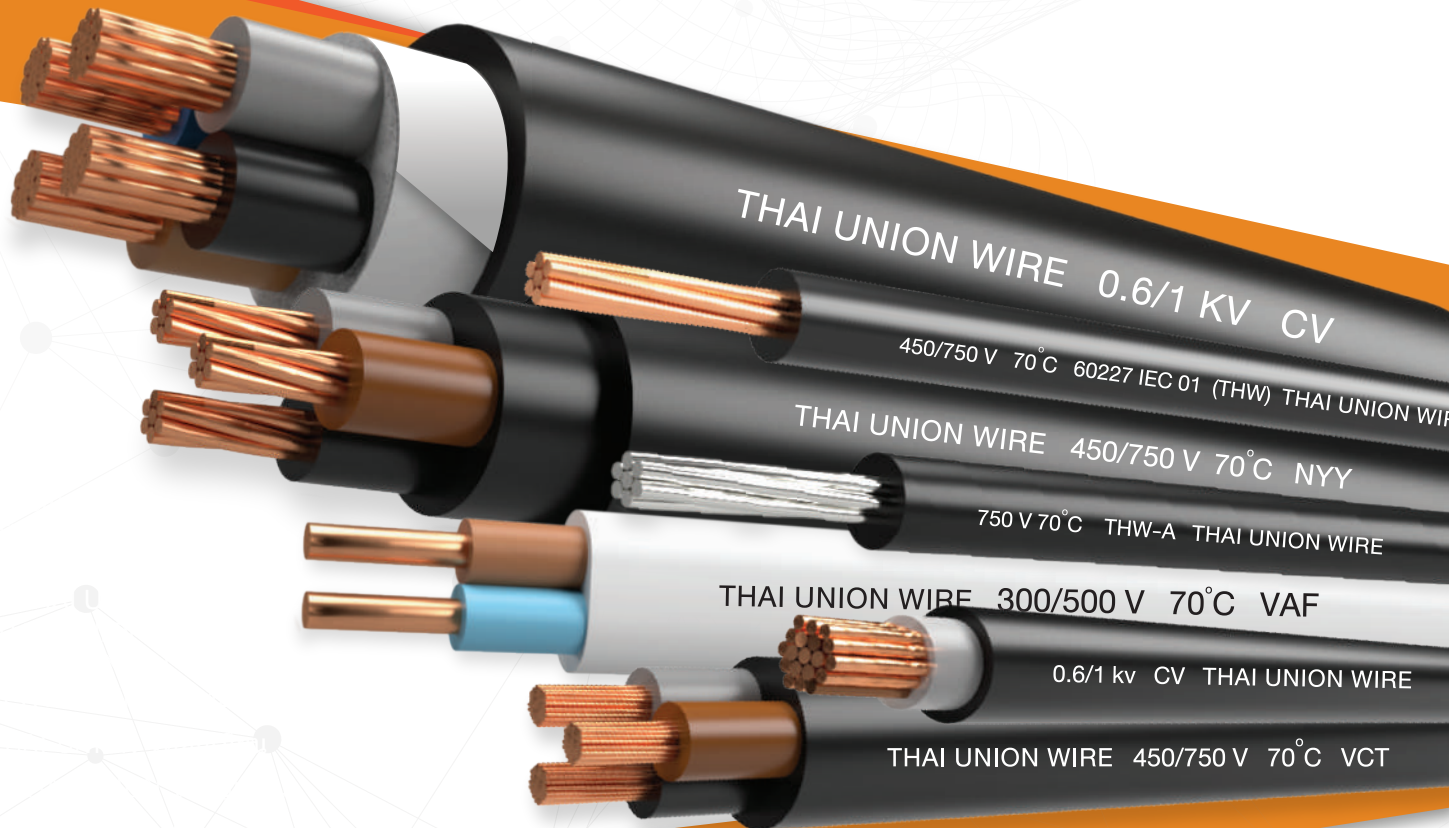

THAI UNION WIRE 0.6/1 KV CV

450/750 V 70°C 60227 IEC 01 (THW) THAI UNION WIRE

THAI UNION WIRE 450/750 V 70°C NYY

750 V 70°C THW-A THAI UNION WIRE

THAI UNION WIRE 300/500 V 70°C VAF


0.6/1 kv CV THAI UNION WIRE

THAI UNION WIRE 450/750 V 70°C VCT



VCT (2-4 แกน)

ประเภท : สายไฟฟ้าใช้งานที่แรงดันไฟฟ้าไม่เกิน 450/750 V
และอุณหภูมิตัวนำไม่เกิน 70°C ชนิดตัวนำสายพอย 2-4 แกน
การใช้งาน : ใช้ต่อเข้าเครื่องใช้ไฟฟ้า อุปกรณ์ไฟฟ้า
 นิยมติดตั้งโดยการเดินบนราง ร้อยท่อฝังดิน

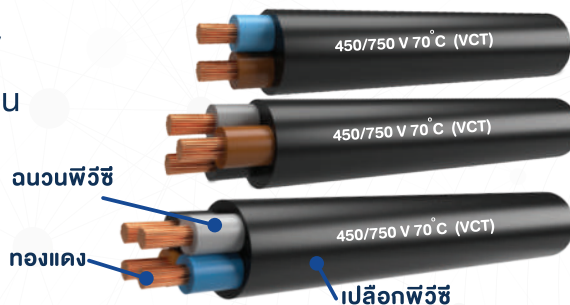

☞ มอก. 101-2559

สี : ●

Number of core	Nominal cross sectional area (mm ²)	Conductor type	Insulation thickness nominal (mm)	Sheath thickness nominal (mm)	Overall diameter (mm)	Conductor resistance at 20°C maximum (Ω/km)	Insulation resistance at 70°C minimum (MΩ-km)	Continuous current rating in free air at 40°C maximum (A)	Cable weight approx. (kg/km)	Standard length (m)
2	1	Flexible	0.8	1.2	9.6	19.5	0.0127	14	100	100/C
	1.5	Flexible	0.8	1.4	11.0	13.3	0.0111	16	130	100/C
	2.5	Flexible	0.8	1.4	12.5	7.98	0.0092	25	170	100/C
	4	Flexible	0.9	1.6	14.5	4.95	0.0084	30	230	100/C
	6	Flexible	0.9	1.6	16.0	3.30	0.0071	39	320	100/C
	10	Flexible	1.1	1.8	20.0	1.91	0.0068	51	500	500/D
	16	Flexible	1.1	2.2	23.0	1.21	0.0050	73	700	500/D
	25	Flexible	1.3	2.4	27.5	0.780	0.0048	97	1000	500/D
3	35	Flexible	1.3	2.6	31.0	0.554	0.0041	140	1400	500/D
	1	Flexible	0.8	1.4	10.5	19.5	0.0127	12	100	100/C
	1.5	Flexible	0.8	1.4	11.5	13.3	0.0111	15	130	100/C
	2.5	Flexible	0.8	1.4	13.0	7.98	0.0092	20	170	100/C
	4	Flexible	0.9	1.6	15.5	4.95	0.0084	26	230	100/C
	6	Flexible	0.9	1.8	17.5	3.30	0.0071	34	320	100/C
	10	Flexible	1.1	2.0	21.5	1.91	0.0068	47	500	500/D
	16	Flexible	1.1	2.4	25.0	1.21	0.0050	63	700	500/D
4	25	Flexible	1.3	2.6	30.0	0.780	0.0048	83	1000	500/D
	35	Flexible	1.3	2.8	33.5	0.554	0.0041	102	1400	500/D
	1	Flexible	0.8	1.6	10.5	19.5	0.0127	12	100	100/C
	1.5	Flexible	0.8	1.6	11.5	13.3	0.0111	15	130	100/C
	2.5	Flexible	0.8	1.6	13.0	7.98	0.0092	20	170	100/C
	4	Flexible	0.9	1.8	15.5	4.95	0.0084	26	230	100/C
	6	Flexible	0.9	2.0	17.5	3.30	0.0071	34	320	100/C
	10	Flexible	1.1	2.2	21.5	1.91	0.0068	47	500	500/D
16	Flexible	1.1	2.6	25.0	1.21	0.0050	63	700	500/D	
25	Flexible	1.3	2.8	30.0	0.780	0.0048	83	1000	500/D	
35	Flexible	1.3	3.1	33.5	0.554	0.0041	102	1400	500/D	

C: Packing in coil
D: Packing in drum

“ ทุกเส้น เน้นคุณภาพ ”